

1 CITY OF SANTA FE, NEW MEXICO

2 ORDINANCE NO. 2017-10

3
4
5 AN ORDINANCE

6 AMENDING SECTION 7-4.2 SFCC 1987, RESIDENTIAL GREEN BUILDING CODE TO BE
7 CONSISTENT WITH THE 2015 INTERNATIONAL RESIDENTIAL CODE AND ADDING
8 RADON MITIGATION.

9
10 BE IT ORDAINED BY THE GOVERNING BODY OF THE CITY OF SANTA FE

11 Section 1. Section 7-4.2 (B) SFCC 1987 (being Ord. #2009-9, as amended) is
12 amended as follows:

13 B. *Residential Green Building Code; Applicability.*

14 (1) The provisions of the Santa Fe Residential Green Building Code shall apply
15 to:

16 (a) new single-family, attached and detached, residential units as defined by
17 the 2015 International Residential Code or its successor as adopted by the
18 city;

19 (b) modular homes which are built off-site and brought onto the site,
20 provided that the *land use director* may approve exceptions to specific code
21 requirements upon a showing by the applicant or modular home supplier that
22 compliance would cause undue burden; and

23 (c) Residential additions that provide for living, sleeping, eating, cooking
24 and sanitation. Only the addition is subject to the code provisions, not the
25 existing structure.

1 (2) Upon request of an applicant, applications for permits submitted prior to
2 March 1, 2017, may be issued in compliance with the prior version of Residential
3 Green Building Code. The permit fee in paragraph F of this subsection shall apply.

4 **Section 2. Section 7-4.2 (E) SFCC 1987 (being Ord. #2009-9, as amended) is**
5 **amended as follows:**

6 E. *Requirements.*

7 (1) Energy performance levels.

8 A documented analysis of the building's energy performance using software
9 in accordance with 2009 ICC IECC Section 405 is required. A projected Home Energy
10 Rating System (HERS) index, or equivalent, shall be submitted as part of a building
11 permit application and a report of the confirmed HERS index, or equivalent, meeting
12 the standards of this section is required prior to issuance of a certificate of occupancy.
13 The required HERS index for residences up to and including 3000 square feet of
14 conditioned space shall be 65 until January 1, 2018, when it shall be reduced to 60.
15 The required HERS index for residences over 3000 feet of conditioned space shall be
16 reduced by one point for each 100 square feet of conditioned space over 3000, or pro-
17 rata portion thereof, until the required HERS index is zero and shall be zero for those
18 and larger residences.

19 (2) HERS raters.

20 HERS raters shall be certified to conduct HERS analysis by passing
21 educational courses and obtaining continuing education credits as required by the land
22 use director. In addition HERS raters shall:

- 23 a. confirm ventilation rates of the ventilation equipment used to satisfy
24 the required house ventilation and report the findings to the land use
25 department;

1 b. supply a report that includes the building components contributing to
2 achievement of the required HERS index to be compared to the building plans
3 submitted for a building permit. Reports approved to supply this information
4 shall be approved by the land use director; and

5 c. supply an estimation of the greenhouse gas emissions avoided and the
6 electricity and natural gas usage avoided when submitting the final or
7 confirmed HERS index. Reports approved to supply this information shall be
8 approved by the land use director.

9 (3) Building envelope insulation values.

10 Building insulation levels shall meet the requirements of overall UA for 2015 IECC.
11 A report of compliance shall be provided to the city as part of a building permit
12 application. Reports approved to supply this information shall be approved by the land
13 use director.

14 (4) Building thermal envelope insulation confirmation.

15 The insulation installers shall provide a certification complying with a template to be
16 provided by the land use department listing the type, manufacturer and R-value of
17 insulation installed in each element of the building thermal envelope. For blown or
18 sprayed insulations (fiberglass and cellulose), the initial installed thickness, settled
19 thickness, settled R-value, installed density, coverage area and number of bags
20 installed shall be listed on the certification. For insulated siding, the R-value shall be
21 listed on the product's package and shall be listed on the certification. The insulation
22 installer shall sign, date and provide the certification in a conspicuous location on the
23 job site. (consistent with 2015 IRC Section N1101.10.1)

24 (5) Air sealing and insulation.

25 The air barrier and insulation installation criteria from Table 402.4.2 from the 2009

1 International Energy Conservation Code shall be visually inspected pursuant to Section
2 402.4.2.2 whether or not the testing option from Section 402.4.2.1 has been achieved.
3 Insulation values shall be verified to match those used to obtain the required HERS
4 rating.

5 (6) Duct installation.

6 The installation instructions for heating, ventilation and air conditioning equipment
7 shall be made available to the inspector conducting the duct installation inspection to
8 ensure ducting meets the manufacture's specifications. It shall be located on the
9 equipment or in a conspicuous location adjacent to the equipment to be easily located
10 by the inspector.

11 (7) Duct leakage.

12 Duct tightness shall be verified in accordance with 2009 IECC section 403.2.2 and
13 shall not exceed 6 percent of total fan flow.

14 (8) Duct protection during construction.

15 All boots, ducts and ventilation openings shall be sealed during construction to prevent
16 dust and debris from entering them and shall remain sealed until they are put into
17 operation.

18 (9) Water conservation levels.

19 Water conservation features are implemented to achieve conservation performance
20 shall be required. A documented analysis using the water efficiency rating score
21 (WERS) tool showing a maximum score of 70 shall be submitted to the land use
22 department as part of a building permit application and a report of the confirmed rating
23 with a maximum score of 70 shall be submitted to the land use department prior to
24 receiving a certificate of occupancy.

25 (10) Whole-house mechanical ventilation requirement.

1 Mechanical ventilation shall be required at a rate based on the following formula:
2 required cubic feet per minute of ventilation = (total heated floor area X .01) +
3 ((number of bedrooms + 1) X 7.5)

4 (11) Heating and cooling equipment sizing and system design.

5 a. Heating and cooling equipment and appliances shall be sized in
6 accordance with Air Conditioning Contractors of America (ACCA) Manual
7 S or other approved sizing methodologies based on building loads calculated
8 in accordance with ACCA Manual J (version 8 or
9 higher) or other approved heating and cooling methodologies.

10 b. Duct systems serving heating, cooling, and ventilation equipment
11 shall be designed and installed in accordance with ACCA Manual D, the
12 manufacturer's installation instructions or other approved methodologies.

13 c. Radiant hydronic systems shall be designed using manufacturer's
14 recommendations, mechanical engineer design specifications or other
15 approved hydronic heating design methods, and shall include equipment
16 specifications, the number of zones, pipe diameter, length, and flow rate for
17 each zone.

18 d. ACCA Manual J, and S, and Manual D and radiant design reports,
19 as applicable, along with an AHRI (Air-Conditioning, Heating and
20 Refrigeration Institute) certificate or equivalent mechanical equipment
21 certification shall be submitted to the land use department either at time of
22 building permit application or no later than the completion of rough framing.
23 Duct design reports shall be submitted before ducts are installed. Radiant
24 hydronic system in concrete shall be submitted before installation.

25 e. All HVAC documents submitted are subject to review and approval by the land use

1 director before installation. Other approved HVAC design methodologies shall be approved by the
2 land use director.”

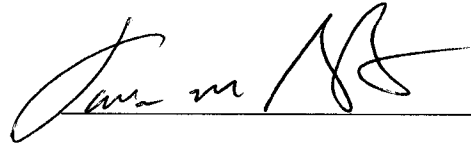
3 (12) Installation of a radon mitigation system consistent with Appendix F of the 2015
4 International Residential Building Code.

5 (~~12~~13) Disclosure of building performance and homeowner’s manual.

6 The following items shall be documented and included in a homeowners manual
7 provided to the first homeowner and available for review for homes that are for sale
8 on forms provided by the land use director:

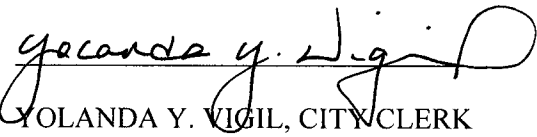
- 9 d. the confirmed HERS index;
 - 10 e. the blower door result at ACH 50;
 - 11 f. the required amount of ventilation and the archived ventilation rate
12 in air changes per hour;
 - 13 g. the type of ventilation system used;
 - 14 h. the percentage better that the UA is above the 2015 IECC maximum
15 requirement;
 - 16 i. the confirmed WERS;
 - 17 j. a diagram showing the location of shut off valves for water,
18 electricity and any combustions fuels (natural gas or propane) with labels in
19 English and Spanish;
 - 20 k. the manuals for all major equipment and fixtures in English and in
21 Spanish if available; and
 - 22 l. All other homeowner manual items available from the land use
23 department at the time of certificate of occupancy for that purpose.
- 24
25

1 PASSED APPROVED and ADOPTED this 31st day of May, 2017.

2
3 

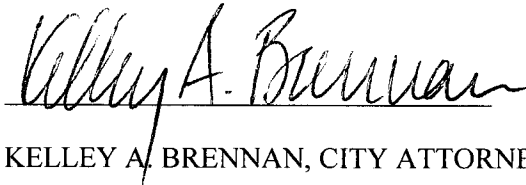
4 JAVIER M. GONZALES, MAYOR

5
6 ATTEST:

7
8 

9 YOLANDA Y. VIGIL, CITY CLERK

10 APPROVED AS TO FORM:

11 

13 KELLEY A. BRENNAN, CITY ATTORNEY